
Alcatel One Touch Fierce Midframe Replacement

Replace the midframe.

Written By: Geoff Wacker

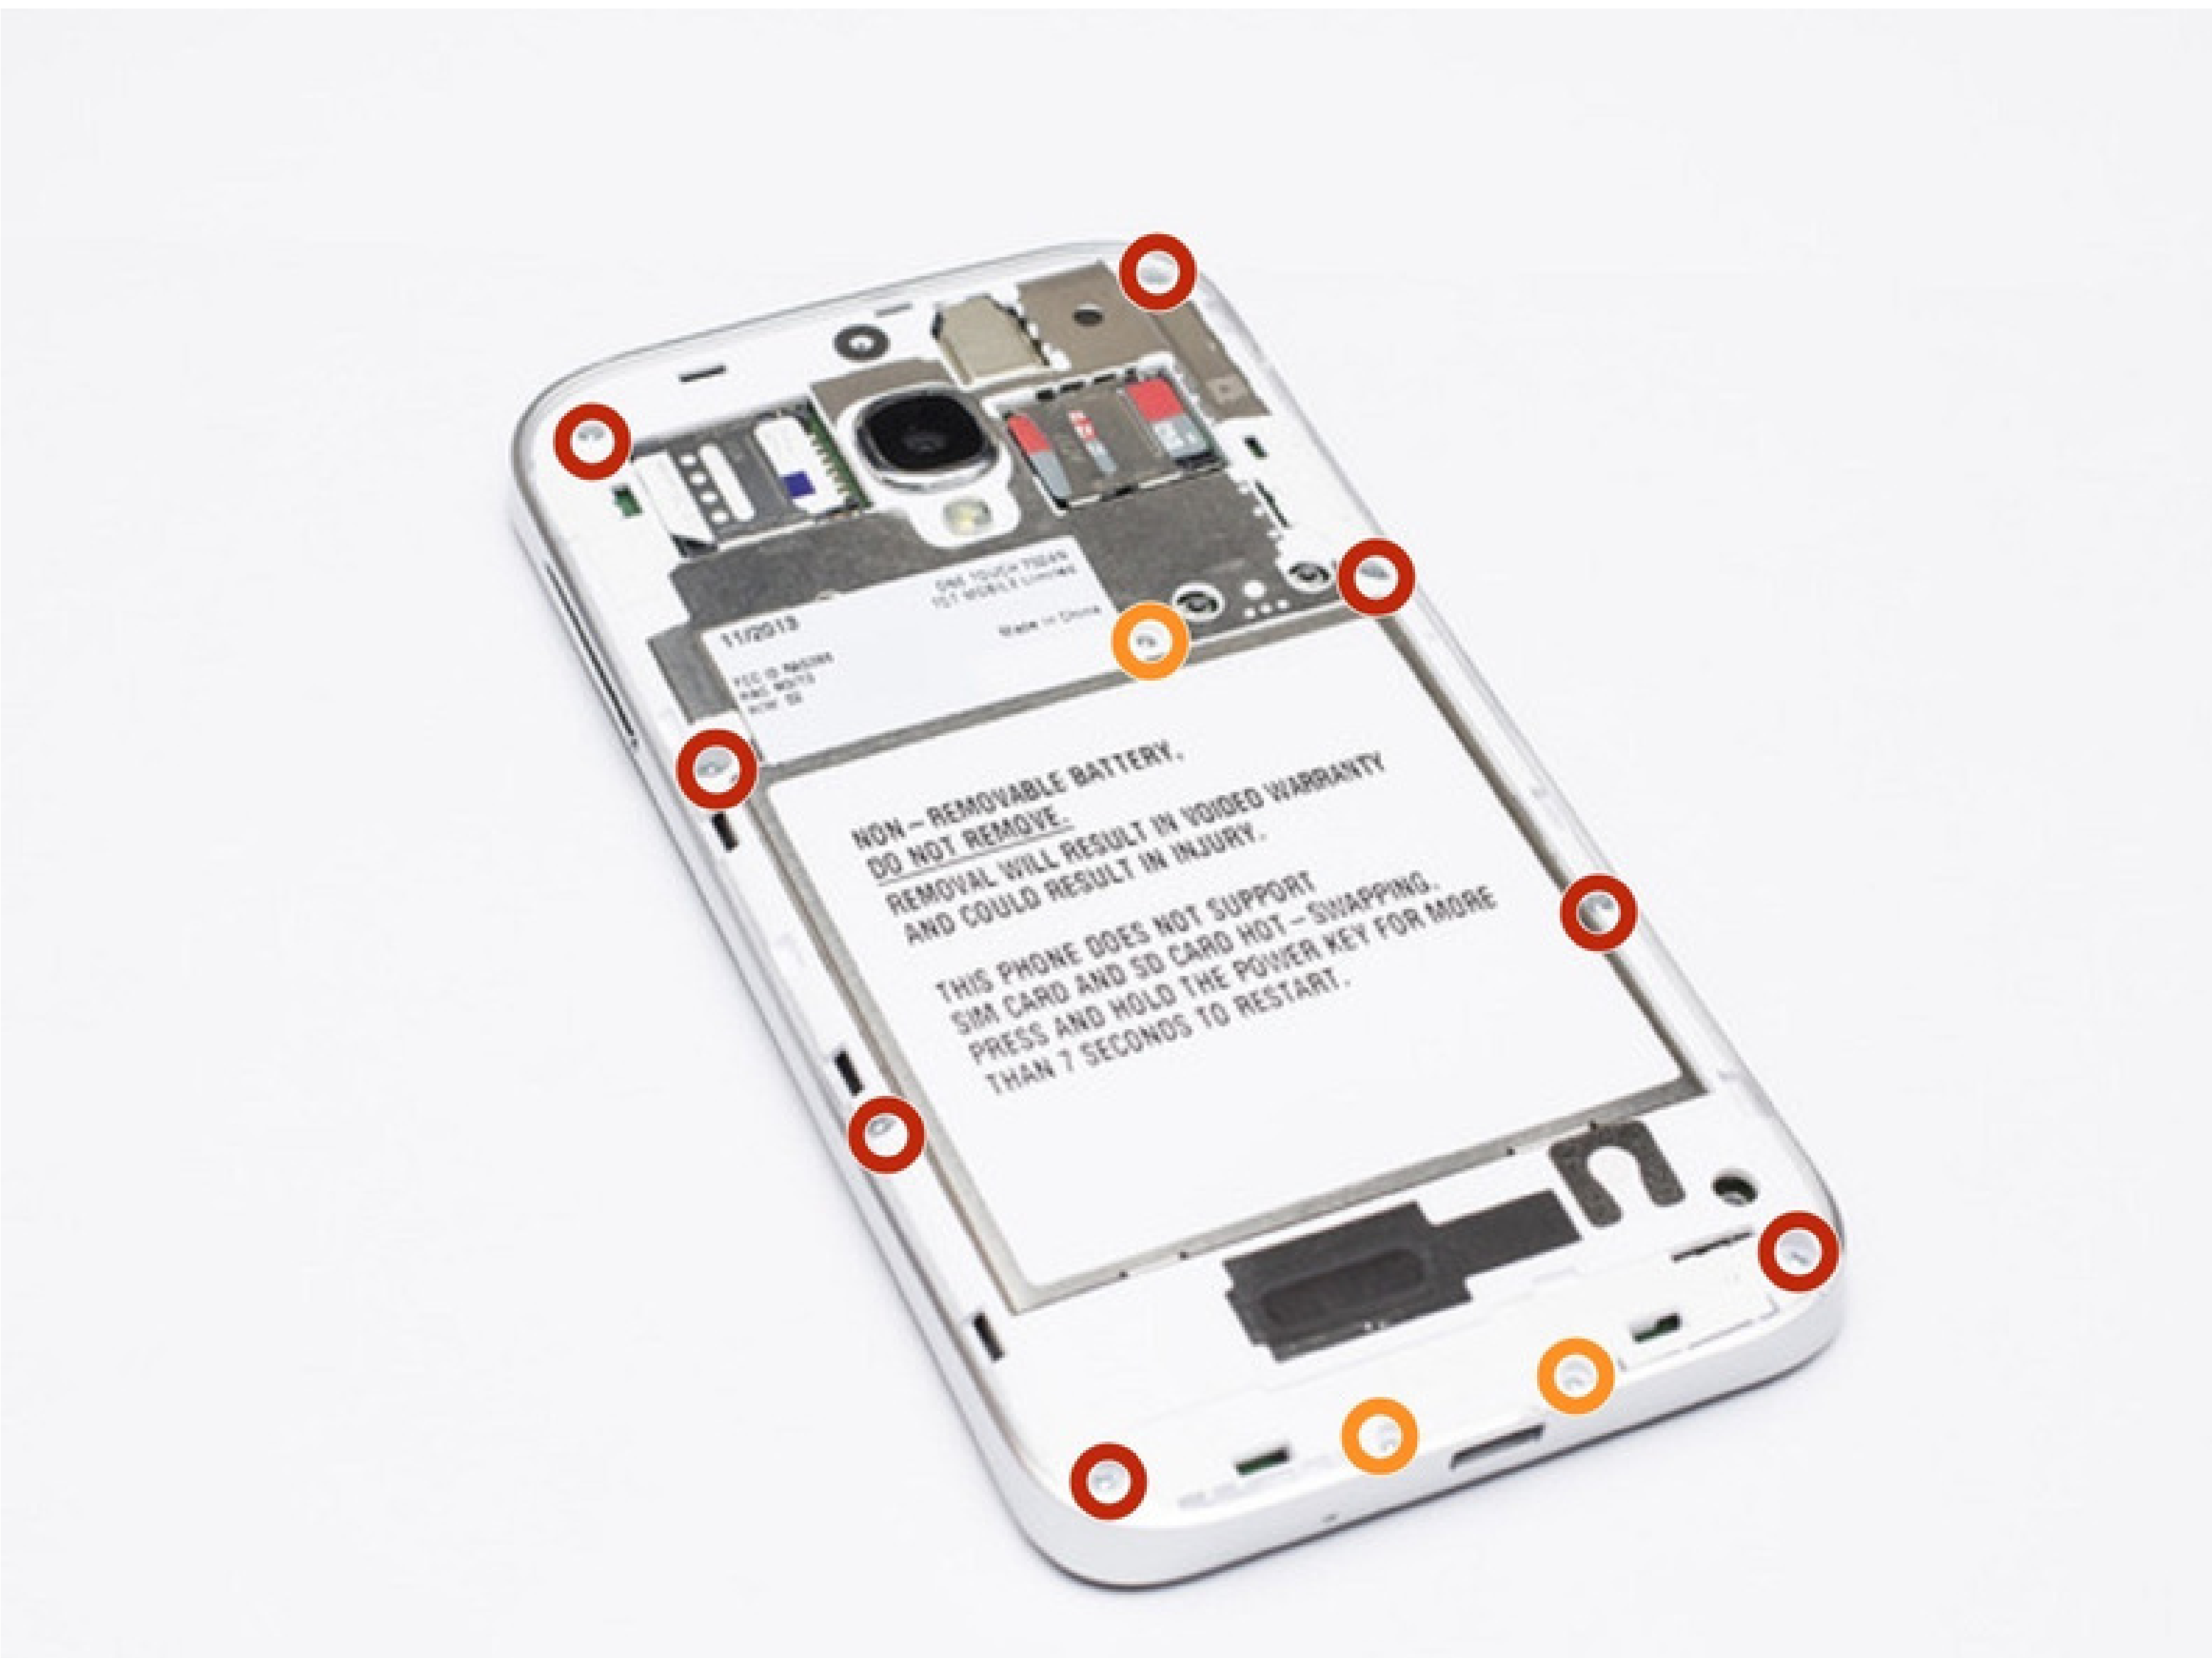

© iFixit — CC BY-NC-SA

INTRODUCTION

Use this guide to replace the midframe on your Alcatel One Touch Fierce.

TOOLS:

- iFixit Opening Tools (1)
- Phillips #000 Screwdriver (1)


Step 1 — Rear Case






- Pry with a plastic opening tool, or your fingernail, in the divot at the bottom left corner of the phone.
- Lift the rear case by the corner nearest the divot and remove it from the phone.

Step 2 — Midframe

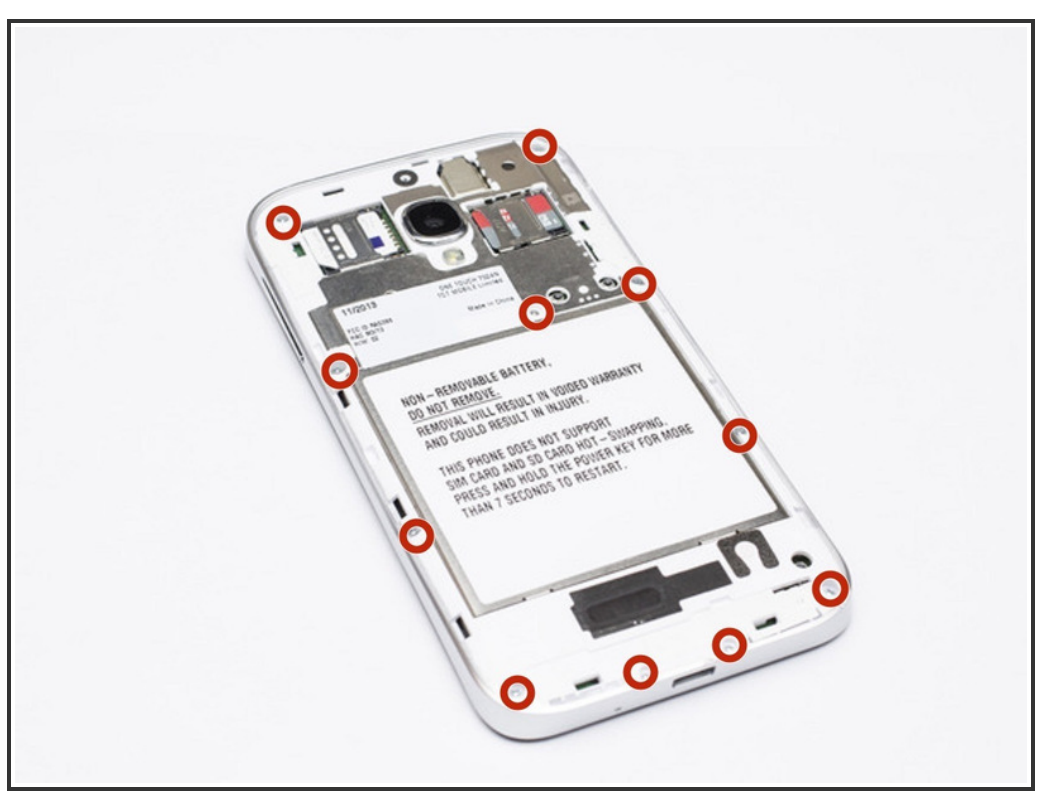

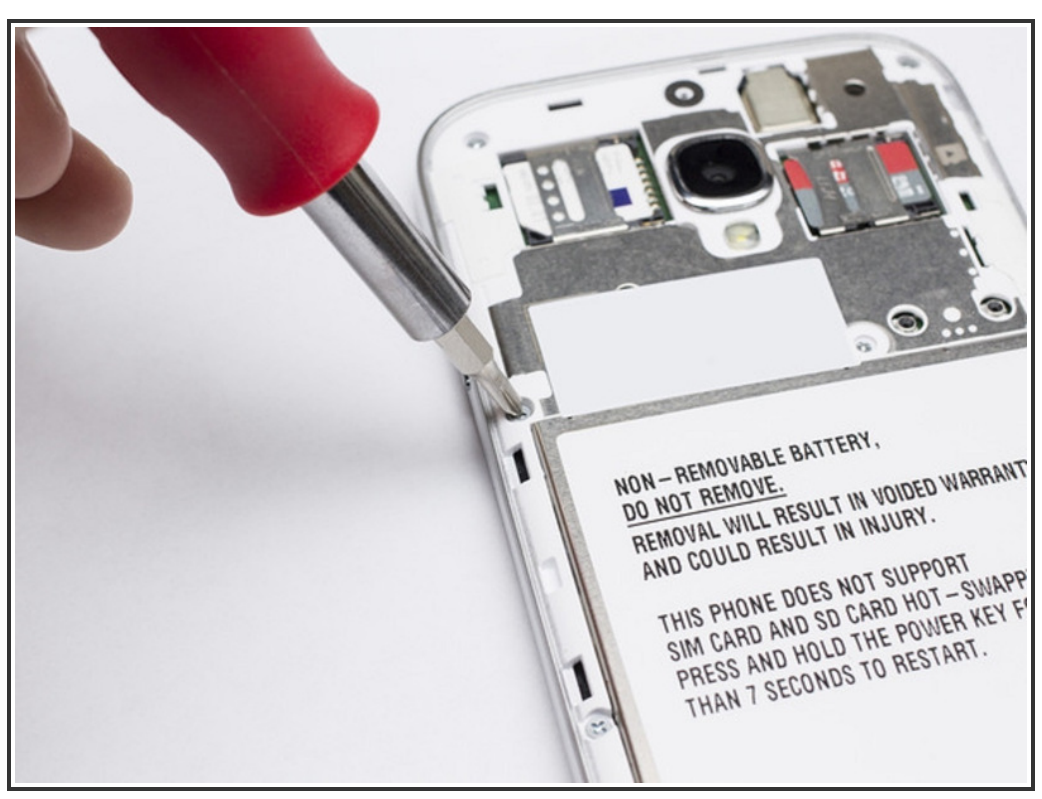



- Remove the 11 Phillips #000 screws.
- The midframe should lift free.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-16 07:47:10 PM.

© iFixit — CC BY-NC-SA